

Card Edge


2 3 3 4 S E R I E S

Ratings:

Current	3A max.
Voltage	125V DC
Dielectric strength	1500V Ac for 1 minute
Contact resistance	20mΩ max.

Material:



Plastic	PBT, Glass-filled, UL 94V-0
Contact	Phosphor Bronze
Temperature	55°C / +105°C

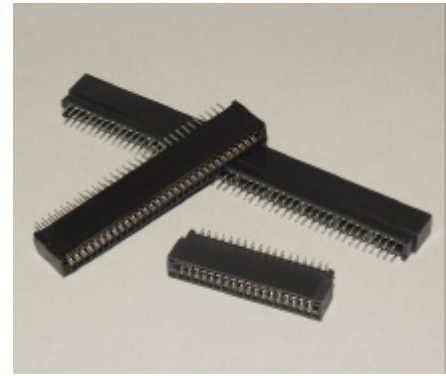


Ordering Procedure:

1 - 2 3 - 4 5 - 6


- 1) Series:
- 2) Positions: (see chart)
- 3) Plating:
 - 1 = Selective Flash Gold*
 - 2 = Selective 10μ Gold*
 - 3 = Selective 30μ Gold*
 - *May require minimums
- 4) Options:
 - R = Right angle

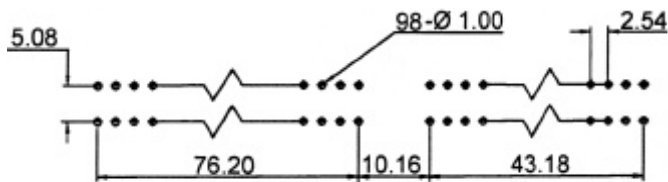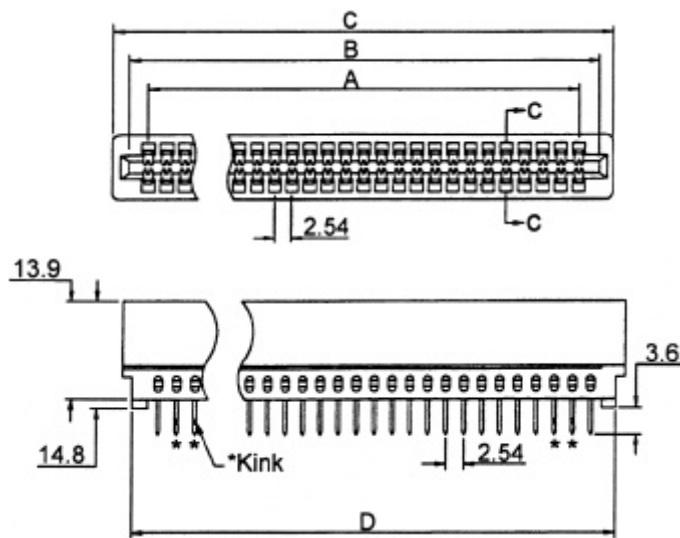

PC Board Layout 98 Pins

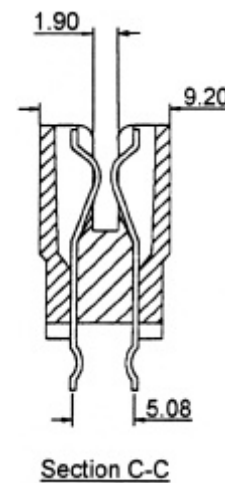

Section C-C

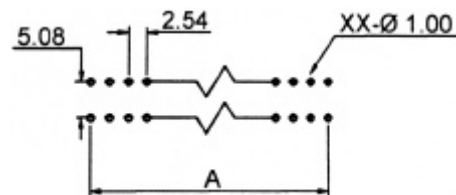

PC Board Layout 36, 62 Pins

Ordering Example:

2334 - 62 - 1

Total Positions	Positions Per Row	Dimensions			
		A	B	C	D
36	18/36	43.18	48.38	52.38	49.71
62	31/62	76.20	81.40	85.40	82.73
98	49/98	129.54	134.74	138.74	136.07

For other positions consult factory.