








EuroDin

3 3 4 6 I SERIES

Din 41612 - Type I

Ratings:

Current 1A
Operating Temperature -55°C/ +125°C

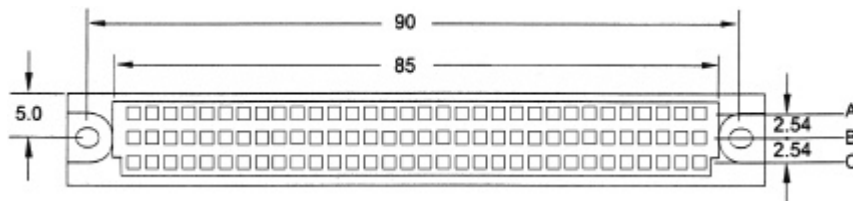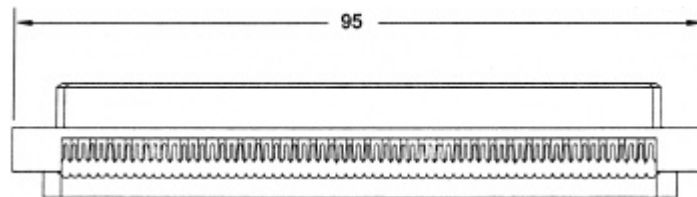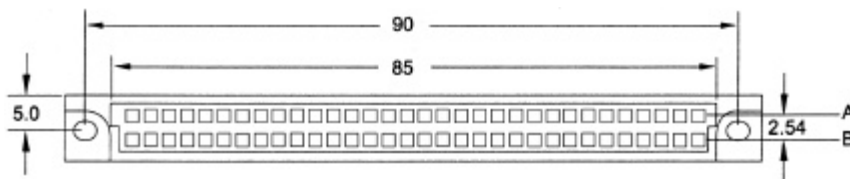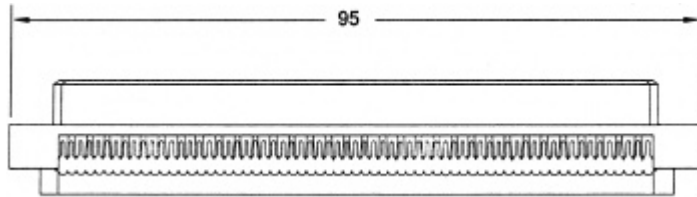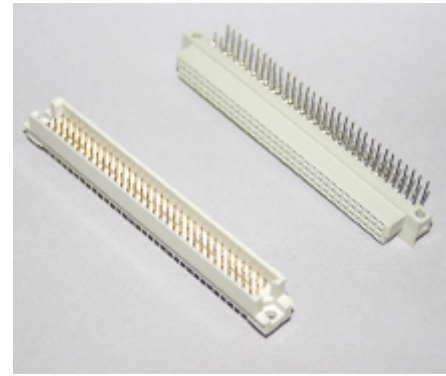

Options:

B - Row A + Row B = 64

C - Row A + Row C = 64