

Dip Sockets - Stamped

3 4 7 7 S E R I E S

Features:


Dual wipe contacts Closed bottom design to prevent wicking
Side and end stackable Pin 1 polarized Optional retention leg

Ratings:

Current 1A
Voltage 10mV - 60V
Dielectric strength > 1000 V (RMS)
Contact resistance 20mΩ
Insulation resistance 5000 Ω min.

Material:

Plastic PBT Glass-filled, UL94V-0
Color Black
Contact Phosphor Bronze
Temperature range -55°C / +100°C, 260° for 5 sec. (solder bath resistant)

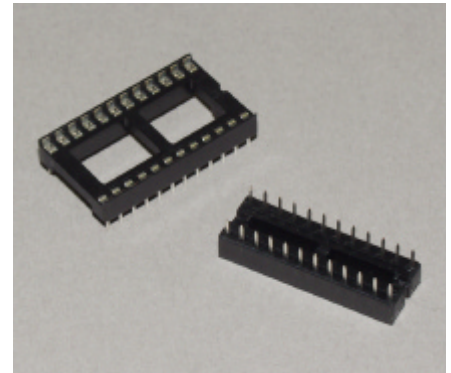

Ordering Procedure:

1 - 2 3 - 4 5 - 6

- 1) Series:
- 2) Positions: (see chart)
- 3) Contact space:
3 = .300
6 = .600
- 4) Plating:
T = Tin
G = Gold*
*May require minimums
- 5) Contact style:
Blank = Straight Leg
1 = Retention Leg
- 6) Options: N/A

Positions	A	B	C
06 (3)	7.62	10.16	7.62
08 (3)	10.16	10.16	7.62
14 (3)	17.78	10.16	7.62
16 (3)	20.32	10.16	7.62
18 (3)	22.86	10.16	7.62
20 (3)	25.40	10.16	7.62
22 (3)	27.94	10.16	7.62
24 (6)	30.48	17.78	15.24
24 (3)	30.48	10.16	7.62
28 (6)	35.56	17.78	15.24
28 (3)	35.56	10.16	7.62
32 (6)	40.64	17.78	15.24
40 (6)	50.80	17.78	15.24
48 (6)	60.96	17.78	15.24

Ordering Example:

3477 - 14 3 - T

