

# IDC Socket 2.54mm


## 4 3 2 7 S E R I E S

### Ratings:

Current	1A DC
Voltage	250 VAC
Dielectric strength	500 VAC for 1 minute
Contact resistance	30mΩ MAX. at 6V DC 0.3A
Insulation resistance	1000MΩ MIN. at 500V DC

### Material:

Plastic	PBT Glass-filled, UL94V-0
Color	Black
Contact	Phosphor Bronze, Gold flash over Nickel

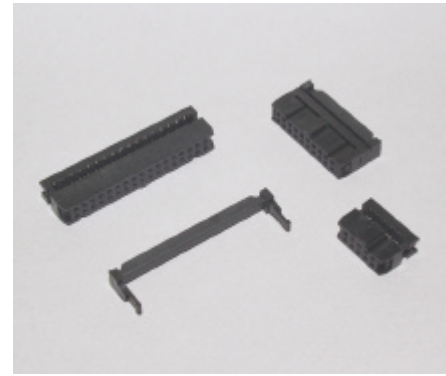

### Ordering Procedure:

1 - 2    3 - 4    5 - 6

- 1) Series:
- 2) Positions: 10, 14, 16, 20, 26, 30, 34, 40, 50, 60, 64
- 3) Options: P = Polarized  
N = Non-polarized
- 4) Strain Relief: 0 = Without  
S = With
- 5) Plating: 1 = Full Gold Flash  
2 = Selective Gold Flash  
3 = Selective 15μ Gold\*  
4 = Selective 30μ Gold\*  
\*May require minimums
- 6) Options: N/A

### Ordering Example:

4327 - 14 N - 0 2

