

Plastic Leaded Chip Carriers - Thru Hole


7 5 2 2 T S E R I E S

Ratings:

Current	1A
Dielectric strength	600mVAC for 1 minute
Insulator resistance	5000M Ω Min.
Temperature	-55°C / +100°C (PBT)

Material:




Insulator	PBT Glass-filled, UL94V-0
Contact	Phosphor Bronze
Plating	Tin over Nickel

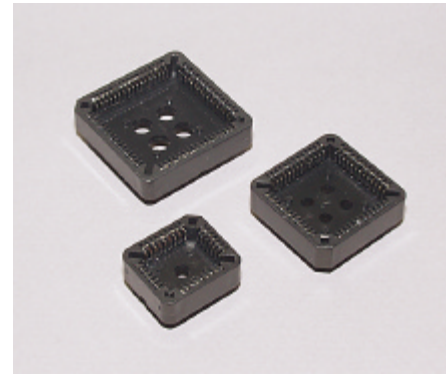

Ordering Procedure:

1 - 2 3 - 4 5 - 6

- 1) Series:
- 2) Positions: (see chart)
- 3) Options:
 - 1 = Non-polarized
 - 2 = Polarized

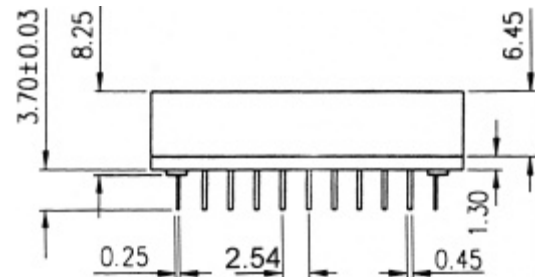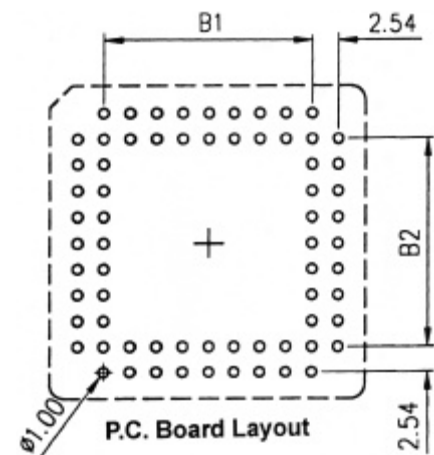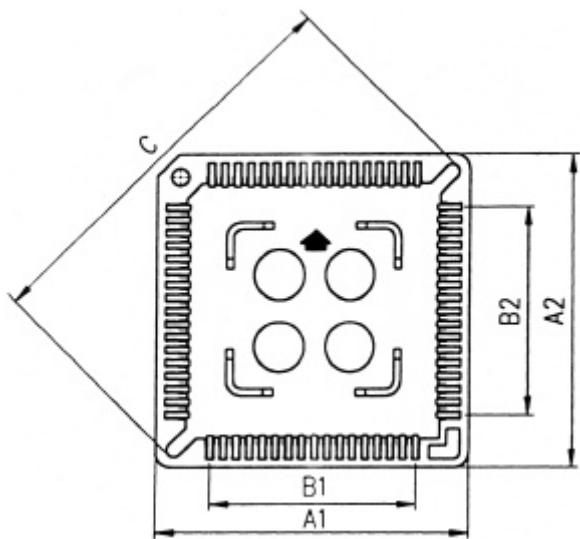

Ordering Example:

7522T - 28 - 1

No. of Positions	Dimensions				
	A1±0.2	A2±0.2	B1±0.2	B2±0.2	C±0.2
20	15.56	15.56	5.08	5.08	18.20
28	18.10	18.10	7.62	7.62	21.70
32	18.10	20.64	7.62	10.16	23.65
44	23.18	23.18	12.70	12.70	28.50
52	25.72	25.72	15.24	15.24	32.50
68	30.80	30.80	20.32	20.32	40.00
84	35.88	35.88	25.40	25.40	47.15